

Road Trip Bag Supply & Cutting List Questions? Email me: jessica@sewmanycreationsny.com

Supplies:

Sew Many Creations Road Trip Bag Pattern

1/4 Yard Outside top

1 Yard Outside Front/back, front flap pockets, luggage handle & back zippered pocket

1/2 Yard Outside bottom

5/8 Yard Short handles & long adjustable handle

1 1/4 Yard Lining

3 Yards Pellon Décor Bond #809 Fusible Interfacing

7/8 Yard Pellon Fusible Fleece Or Fusible Thermolam

(1) 30" or longer Plastic Purse Zipper for top of bag (Purse zippers have wider tape than regular plastic zippers)

(1) 12" or longer Plastic Zipper for zippered outside back pocket

(2) Twist Locks for Flaps (You can use a different type of hardware if you'd like, such as a magnetic snap or Velcro)

1 Slide, 2 Rings & 2 Swivel hooks 1 1/2" W for adjustable strap (See pattern for more details of different options available)

1/4" Wide Iron-On Double Stick Fusible Tape

Fray check & Strong Glue (such as E6000 or Gutermann HT2) for twist lock

Clover Binding Clips are very helpful for thick layers

All usual sewing/quilting supplies including matching thread for topstitching, sewing machine with 1/4" foot pins, rotary cutter, ruler, mat, pencil, seam ripper, etc.

Bonus Project: Make 1-2 zipper pouches from leftover fabric.

Additional supplies needed: (1-2) 12" or longer Plastic zippers

From outside top fabric cut:

(2) 4" H x 29" W strips - A

From outside front/back, pocket fabric cut:

(See cutting diagram below for best use of fabric)

(2) 9 1/2" H x 29" W strips for front/back - B

(2) 6 1/2" H x 12 1/2" W strips for flap pocket base - C

(4) 4" H x 6 1/2" W strips for flaps - D

(1) 14" square for back zippered pocket - E

(1) 6" H x 16" W strip for luggage handle - F

From outside bottom fabric cut:

(2) 7 1/2" H x 29" W strips - G

From handle fabric cut:

(3) 6" H x WOF strips - H (short handles), I (adjustable strap) & J (tabs)

From lining fabric cut:

(2) 20" H x 29" W rectangles - K

From fusible interfacing cut:

(2) 4" x 29" - A

(2) 9 1/2" x 29" - B

(2) 6 1/2" x 12 1/2" - C

(4) 4" x 6 1/2" - D

(1) 6" x 14" - F (Yes 2" shorter than strip! (Interfacing should be fused centered)


(2) 7 1/2" x 29" - G

(3) 6" x WOF - H & I (Only fuse one of the 6" x WOF strips before class)

(2) 20" x 29" - K

From fusible fleece cut:


(2) 19" x 28" - K (fleece should be centered)

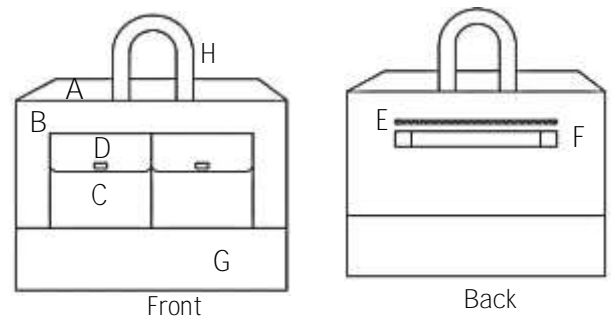

Before Class Please have all pieces cut and fused except for "I".

Cut pieces I only - see notes below.

Label Each Piece.

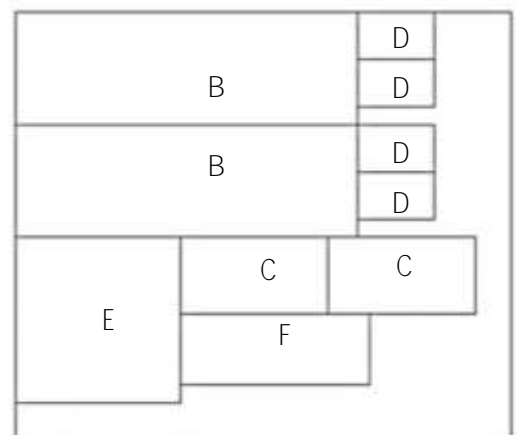

Cutting diagram for B-F